

LST Low Surface Temperature Heater



Product Description

Advanced performance and controls. This low surface temperature panel heater meets the requirements of the NHS directive advising a maximum contact temperature of 43 degrees. This makes the unit safe for specification in schools, hospitals, public areas and other sensitive environments.


Key Features

- Electronic thermostatic control
- Touch-sensitive electronic control offering simple, extensive control of time and temperature
- Fanned heat for rapid warm up
- Quiet operation (just 35dB)
- Limited surface temperature

Technical Details

Power	500W, 750W, 1000W, 1500W
Thermostat Controls	7-32°C
Control Options	Two pre-set timer modes Holiday mode User timer Eco mode Frost protection
Thermostat	Electronic type, accurate to $\pm 0.2^{\circ}\text{C}$
Element	Sheathed, finned element
Colour / Finish	White / Steel
IP Rating	IP24

Dimensions

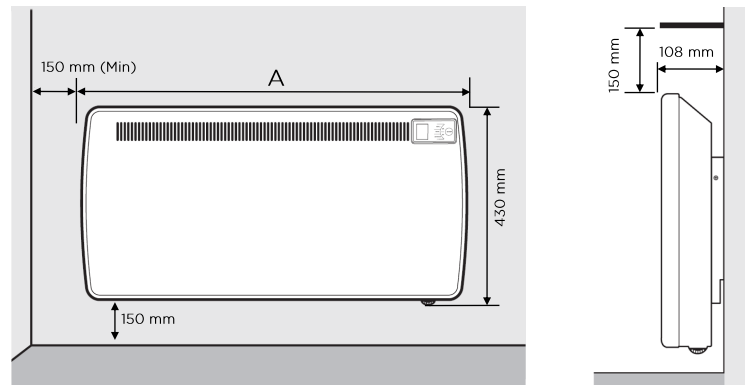

Model/Item No.(EAN-Code 5011139+Item No.)	054302	LST050	051011	LST075	051028	LST100	051035	LST150
Output (kW)	0.50		0.75		1.00			1.50
Height (mm)	430	430	430	430	430	430	430	430
Width 'A' (mm)	688	688	688	688	688	688	860	860
Depth (mm)	108	108	108	108	108	108	108	108
Weight (Kg)	7.1	7.1	7.1	7.1	8.7	8.7	9.4	9.4

Packaging Details

Height (mm)	495	495	495	495
Width (mm)	730	730	730	900
Depth (mm)	145	145	145	145
Packed Weight (Kg)	9.3	9.3	9.3	11.2
Ti	9	9	9	6
Hi	4	4	4	4
Pallet Quantity (2.4m high)	36	36	36	24

Warranty & Approvals

Approvals	NHS LST Directive, CE, BEAB
Warranty	2 Years
Country of Origin	United Kingdom
Manufacturer	Glen Dimplex Heating & Ventilation (GDC Group Ltd)